March 2019

Asbestos Containing Material Survey

Vacant Residential Structure
79 Lester Avenue
Village of Ilion
Herkimer County, New York

Prepared for:

Mr. John Mazzarella III
Project Manager
Greater Mohawk Valley Land Bank
500 East Main Street Suite 2A
Little Falls, New York 13365

Prepared by:

C.T. MALE ASSOCIATES
50 Century Hill Drive
Latham, New York 12110
518-786-7400
FAX 518-786-7299

C.T. Male Project No: 19.9107

Unauthorized alteration or addition to this document is a violation of Section 7209 Subdivision 2 of the New York State Education Law.

© Copyright 2019

C.T. MALE ASSOCIATES ENGINEERING, SURVEYING, ARCHITECTURE, LANDSCAPE ARCHITECTURE, & GEOLOGY D.P.C.

ASBESTOS CONTAINING MATERIAL SURVEY

Vacant Residential Structure
79 Lester Drive
Ilion, NY

TABLE OF CONTENTS

Page

1.0 INTRODUCTION 1

2.0 SITE VISIT - ASBESTOS CONTAINING MATERIALS 2

3.0 SAMPLING AND LABORATORY ANALYSIS 3

4.0 CONCLUSIONS AND RECOMMENDATIONS 11

TABLES

TABLE 3.0 BULK SAMPLE ANALYSIS RESULTS

APPENDICES

APPENDIX A C.T. MALE ASSOCIATES, P.C. CERTIFICATIONS

APPENDIX B LABORATORY CERTIFICATIONS

APPENDIX C ACM ANALYSIS RESULTS & CHAIN OF CUSTODY

APPENDIX D ACM SURVEY ABATEMENT COST ESTIMATES

1.0 INTRODUCTION

This report presents the findings of an asbestos containing material (ACM) survey of the residence located at 79 Lester Avenue in Ilion, New York. This building is a two-story, wood framed vacant residential structure, with a basement and a peaked roof.

The purpose of this report was to determine whether there are asbestos containing materials in the structure prior to demolition activities. The survey included identification of suspect asbestos containing materials, quantification, and bulk sampling of suspect asbestos containing materials. Laboratory analysis was performed to determine the presence and type of asbestos in sampled materials. Any material is considered asbestos containing if it contains one percent, or more, asbestos by weight.

What is known as "destructive" inspection and sampling techniques may have been used when necessary. Destructive techniques are used, where appropriate, to look behind walls, above ceilings and under floors to access any piping, sub-structures or miscellaneous materials that may exist.

C.T. Male Associates, P.C. (C.T. Male) personnel conducted this ACM survey. C.T. Male possesses EPA accreditation and asbestos certification, as required by the New York State Department of Labor, as Inspectors for asbestos.

2.0 SITE VISIT - ASBESTOS CONTAINING MATERIALS

C.T. Male personnel visited the site on March 13, 2019.

A walk through of the subject areas was conducted during which suspect asbestos containing materials were identified. Three major categories of suspect materials are categorized during asbestos inspections: Surfacing Materials, Thermal System Insulation (TSI) and Miscellaneous Materials. These categories are described below:

Surfacing Material - Materials that are sprayed-on, trowelled-on or otherwise applied to surfaces. Examples include acoustical plaster on ceilings and/or walls, fireproofing materials on structural members, or decorative applications.

Thermal System Insulation - Materials, usually found on piping, fittings, boilers, tanks, ducts or other mechanical components to prevent heat loss or gain.

Miscellaneous ACM - Any other materials including, but not limited to, floor and ceiling tiles, gaskets, felts, paper products, etc. that are neither surfacing materials nor thermal system insulation.

During the course of the site visit, suspect materials of similar type, texture and appearance are grouped together and considered homogeneous. Each homogeneous material is quantified and depending on overall quantity as well as the locations of the material throughout the site an appropriate number of bulk samples were secured.

Suspect Materials Located

Sheet Flooring	Rock Lath
Plaster	Wallpaper
Wall Paneling Adhesive	Wall Paneling
Asphalt Roofing Paper	Asphalt Roofing Shingles
Asphalt Siding	Window Glazing Compound

3.0 SAMPLING AND LABORATORY ANALYSIS

C.T. Male's representative collected 50 bulk samples during the site-visit. The samples were analyzed using Polarized Light Microscopy (PLM). Non-friable organically bound materials were analyzed using the Matrix Reduction Method in conjunction with PLM based on the New York State Department of Health Environmental Laboratory Approval Program recommendations. Any negative sample analysis results by this method are then analyzed further by Transmission Electron Microscopy (TEM). Non-friable organically bound materials are bound by cements or adhesives. Examples include floor tile, floor tile mastic and sheet floor covering. AmeriSci New York of New York, New York performed analysis of the bulk samples by PLM or TEM. Table 3.0 provides a summary of analysis results.

TABLE 3.0
BULK SAMPLE ANALYSIS RESULTS

Sample Location	% ASBESTOS BY WEIGHT	TYPE OF ASBESTOS
031319BD01 Exterior Main Roof Asphalt Paper (layer 1 - bottom)	NA	NAD
031319BD02 Exterior Main Roof Asphalt Paper (layer 1 - bottom)	NA	NAD
031319BD03 Exterior Main Roof Asphalt Paper (layer 2)	NA	NAD
031319BD04 Exterior Main Roof Asphalt Paper (layer 2)	NA	NAD

NA = Not Applicable **NAD = No Asbestos Detected**

Sample Location	% ASBESTOS BY WEIGHT	TYPE OF ASBESTOS
031319BD05 Exterior Main Roof Asphalt Shingle (layer 3)	NA	NAD
031319BD06 Exterior Main Roof Asphalt Shingle (layer 3)	NA	NAD
031319BD07 Exterior Main Roof Asphalt Paper (layer 4)	NA	NAD
031319BD08 Exterior Main Roof Asphalt Paper (layer 4)	NA	NAD
031319BD09 Exterior Main Roof Asphalt Shingle (layer 5)	NA	NAD
031319BD10 Exterior Main Roof Asphalt Shingle (layer 5)	NA	NAD
031319BD11 Exterior Main Roof Asphalt Paper (layer 6)	NA	NAD

NA = Not Applicable **NAD = No Asbestos Detected**

Sample Location	% ASBESTOS BY WEIGHT	TYPE OF ASBESTOS
031319BD12 Exterior Main Roof Asphalt Paper (layer 6)	NA	NAD
031319BD13 Exterior Main Roof Asphalt Shingle (layer 7 - top)	NA	NAD
031319BD14 Exterior Main Roof Asphalt Shingle (layer 7 - top)	NA	NAD
031319BD15 Exterior Deck Roof Asphalt Paper	NA	NAD
031319BD16 Exterior Deck Roof Asphalt Paper	NA	NAD
031319BD17 Exterior Deck Roof Asphalt Shingle	NA	NAD
031319BD18 Exterior Deck Roof Asphalt Shingle	NA	NAD

NA = Not Applicable **NAD = No Asbestos Detected**

Sample Location	% ASBESTOS BY WEIGHT	TYPE OF ASBESTOS
031319BD19 Exterior Walls Asphalt Siding	NA	NAD
031319BD20 Exterior Walls Asphalt Siding	NA	NAD
031319BD21 Exterior Windows Glazing Compound	NA	NAD
031319BD22 Exterior Windows Glazing Compound	NA	NAD
031319BD23 1st Floor Entry & Kitchen Sheet Flooring	NA	NAD
031319BD24 1st Floor Entry & Kitchen Sheet Flooring	NA	NAD
031319BD25 2nd Floor Bathroom Sheet Flooring	NA	NAD

NA = Not Applicable **NAD = No Asbestos Detected**

Sample Location	% ASBESTOS BY WEIGHT	TYPE OF ASBESTOS
031319BD26 2nd Floor Bathroom Sheet Flooring	NA	NAD
031319BD27 2nd Floor Bedroom 1 Sheet Flooring	NA	NAD
031319BD28 2nd Floor Bedroom 1 Sheet Flooring	NA	NAD
031319BD29 2nd Floor Bedroom 1 Closet Sheet Flooring	NA	NAD
031319BD30 2nd Floor Bedroom 1 Closet Sheet Flooring	NA	NAD
031319BD31 2nd Floor Bedroom 2 Closet Sheet Flooring	NA	NAD
031319BD32 2nd Floor Bedroom 2 Closet Sheet Flooring	NA	NAD

NA = Not Applicable **NAD = No Asbestos Detected**

Sample Location	% ASBESTOS BY WEIGHT	TYPE OF ASBESTOS
031319BD33 Interior Throughout Rock Lath	NA	NAD
031319BD34 Interior Throughout Rock Lath	NA	NAD
031319BD35 2nd Floor Bedroom 2 Rock Lath	NA	NAD
031319BD36 2nd Floor Bedroom 2 Rock Lath	NA	NAD
031319BD37 Interior Throughout Plaster (Brown)	<0.25%	Chrysotile
031319BD38 Interior Throughout Plaster (Brown)	0.8%	Chrysotile
031319BD39 Interior Throughout Plaster (Brown)	0.5%	Chrysotile

NA = Not Applicable **NAD = No Asbestos Detected**

Sample Location	% ASBESTOS BY WEIGHT	TYPE OF ASBESTOS
031319BD40 Interior Throughout Plaster (Brown)	0.5%	Chrysotile
031319BD41 1st Floor Dining Room Wallpaper	NA	NAD
031319BD42 1st Floor Dining Room Wallpaper	NA	NAD
031319BD43 1st to 2nd Floor Stairwell Wallpaper	NA	NAD
031319BD44 1st to 2nd Floor Stairwell Wallpaper	NA	NAD
031319BD45 1st Floor Kitchen Plaster (Brown)	<0.25%	Chrysotile
031319BD46 1st Floor Kitchen Plaster (Brown)	<0.25%	Chrysotile

NA = Not Applicable **NAD = No Asbestos Detected**

Sample Location	% ASBESTOS BY WEIGHT	TYPE OF ASBESTOS
031319BD47 1st Floor Kitchen Wall Panel Adhesive	NA	NAD
031319BD48 1st Floor Kitchen Wall Panel Adhesive	NA	NAD
031319BD49 1st Floor Kitchen Wall Paneling	NA	NAD
031319BD50 1st Floor Kitchen Wall Paneling	NA	NAD

NA = Not Applicable **NAD = No Asbestos Detected**

4.0 CONCLUSIONS AND RECOMMENDATIONS

Based upon observations during the inspection and the laboratory analysis results, asbestos containing materials were not located.

Per the requirements of NYSDOL Industrial Code Rule 56 (as amended January 12, 2006), the building owner shall transmit copies of this inspection pre-renovation report to 1) the local agency charged with issuing the building demolition/renovation permit; 2) the local Asbestos Control Bureau Office (Albany District, State Office Campus, Building 12 Room 157, Albany, New York 12240); and 3) as required, this report is to be kept on site during any abatement activities and/or demolition, renovation, remodeling or repair activities.

If you have any questions regarding this report, please contact this office at (518) 786-7400.

Respectfully submitted,

C.T. MALE ASSOCIATES

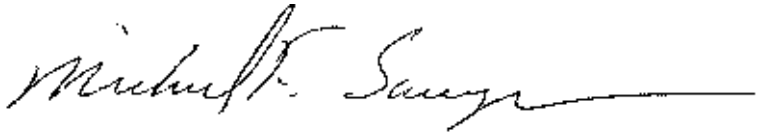

Michael F. Sawyer
Managing Industrial Hygienist

APPENDIX A

C.T. MALE ASSOCIATES
CERTIFICATIONS

C.T. MALE ASSOCIATES, P.C.

CERTIFICATIONS

C.T. Male's Asbestos Contractor's License:

License Number:	29050
Expiration Date:	10-31-2019

Michael F. Sawyer

NYSDOL Asbestos Certificate Number:	AH88-06552
Inspector:	09-19
Project Designer:	09-19
OSHA 40-HR Certified	

John W. Debell

NYSDOL Asbestos Certificate Number:	AH16-18568
Inspector:	02-20

New York State – Department of Labor
Division of Safety and Health
License and Certificate Unit
State Campus, Building 12
Albany, NY 12240

ASBESTOS HANDLING LICENSE

C.T. Male Associates Engineering, Surveying,
Architecture & Landscape Architecture, P.C.

50 Century Hill Drive

Latham, NY 12110

FILE NUMBER: 99-0722
LICENSE NUMBER: 29050
LICENSE CLASS: RESTRICTED
DATE OF ISSUE: 10/31/2018
EXPIRATION DATE: 10/31/2019

Duly Authorized Representative – Daniel Reilly:

This license has been issued in accordance with applicable provisions of Article 30 of the Labor Law of New York State and of the New York State Codes, Rules and Regulations (12 NYCRR Part 56). It is subject to suspension or revocation for a (1) serious violation of state, federal or local laws with regard to the conduct of an asbestos project, or (2) demonstrated lack of responsibility in the conduct of any job involving asbestos or asbestos material.

This license is valid only for the contractor named above and this license or a photocopy must be prominently displayed at the asbestos project worksite. This license verifies that all persons employed by the licensee on an asbestos project in New York State have been issued an Asbestos Certificate, appropriate for the type of work they perform, by the New York State Department of Labor.

Eileen M. Franko, Director
For the Commissioner of Labor

SH 432 (8/12)

STATE OF NEW YORK - DEPARTMENT OF LABOR
ASBESTOS CERTIFICATE

N.Y.S

MICHAEL F SAWYER
CLASS(EXPIRES)
C ATEC(09/19) D INSP(09/19)
E MGPL(09/19) H PM (09/19)
I PD (09/19)

CERT# 88-06552
DMV# 437658014

MUST BE CARRIED ON ASBESTOS PROJECTS

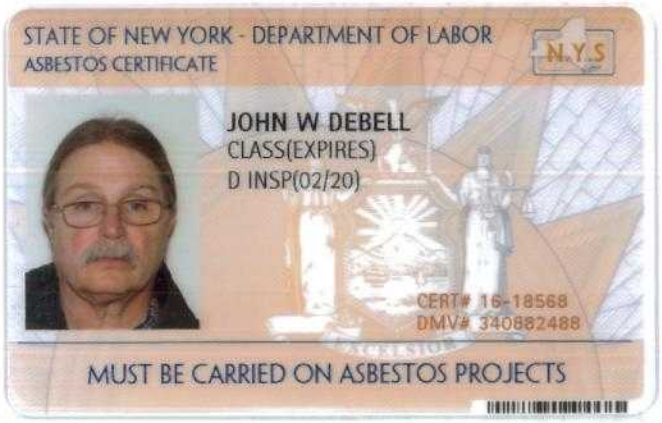
STATE OF NEW YORK - DEPARTMENT OF LABOR
ASBESTOS CERTIFICATE
N.Y.S
JOHN W DEBELL
CLASS(EXPIRES)
D INSP(02/20)
CERT# 16-18568
DMV# 340882488
MUST BE CARRIED ON ASBESTOS PROJECTS

APPENDIX B

LABORATORY CERTIFICATIONS

NEW YORK STATE DEPARTMENT OF HEALTH
WADSWORTH CENTER

Expires 12:01 AM April 01, 2019
Issued April 01, 2018

CERTIFICATE OF APPROVAL FOR LABORATORY SERVICE

Issued in accordance with and pursuant to section 502 Public Health Law of New York State

MR. PAUL J. MUCHA
AMERICA SCIENCE TEAM NEW YORK, INC
117 EAST 30TH ST
NEW YORK, NY 10016

NY Lab Id No: 11480

is hereby APPROVED as an Environmental Laboratory for the category
ENVIRONMENTAL ANALYSES SOLID AND HAZARDOUS WASTE
All approved subcategories and/or analytes are listed below:

Miscellaneous

Asbestos in Friable Material	Item 198.1 of Manual
	EPA 600/M4/82/020
Asbestos in Non-Friable Material-PLM	Item 198.6 of Manual (NOB by PLM)
Asbestos in Non-Friable Material-TEM	Item 198.4 of Manual

Serial No.: 57809

Property of the New York State Department of Health. Certificates are valid only at the address shown, must be conspicuously posted, and are printed on secure paper. Continued accreditation depends on successful ongoing participation in the Program. Consumers are urged to call (518) 485-5570 to verify the laboratory's accreditation status.

APPENDIX C

LABORATORY ANALYSIS REPORTS & CHAIN OF CUSTODY

AmeriSci New York
117 EAST 30TH ST.
NEW YORK, NY 10016
TEL: (212) 679-8600 • FAX: (212) 679-3114

PLM Bulk Asbestos Report

C. T. Male & Associates
Attn: Michael Sawyer
50 Century Hill Drive
P.O. Box 727
Latham, NY 12110

Date Received 03/14/19 **AmeriSci Job #** 219032420
Date Examined 03/18/19 **P.O. #**
ELAP # 11480 **Page** 1 **of** 9
RE: 19.9107; GMV Land Bank; Ilion, NY

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
031319BD01 1	219032420-01 **Location:** 79 Lester Ave, Main Roof - Asphalt Paper	*No*	NAD [1] (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 4.4 %			
031319BD02 1	219032420-02 **Location:** 79 Lester Ave, Main Roof - Asphalt Paper	*No*	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 8.7 %			
031319BD03 2	219032420-03 **Location:** 79 Lester Ave, Main Roof - Asphalt Paper	*No*	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 1.3 %			
031319BD04 2	219032420-04 **Location:** 79 Lester Ave, Main Roof - Asphalt Paper	*No*	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 1.1 %			
031319BD05 3	219032420-05 **Location:** 79 Lester Ave, Main Roof - Asphalt Shingle	*No*	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 1.9 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

19.9107; GMV Land Bank; Ilion, NY

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
031319BD06 3	219032420-06 **Location:** 79 Lester Ave, Main Roof - Asphalt Shingle	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 7.3 %			
031319BD07 4	219032420-07 **Location:** 79 Lester Ave, Main Roof - Asphalt Paper	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 22.9 %			
031319BD08 4	219032420-08 **Location:** 79 Lester Ave, Main Roof - Asphalt Paper	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 16.2 %			
031319BD09 5	219032420-09 **Location:** 79 Lester Ave, Main Roof - Asphalt Shingle	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 33.9 %			
031319BD10 5	219032420-10 **Location:** 79 Lester Ave, Main Roof - Asphalt Shingle	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 29.6 %			
031319BD11 6	219032420-11 **Location:** 79 Lester Ave, Main Roof - Asphalt Paper	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 7 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

19.9107; GMV Land Bank; Ilion, NY

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
031319BD12 6	219032420-12 **Location:** 79 Lester Ave, Main Roof - Asphalt Paper	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 1 %			
031319BD13 7	219032420-13 **Location:** 79 Lester Ave, Main Roof - Asphalt Shingle	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 27.8 %			
031319BD14 7	219032420-14 **Location:** 79 Lester Ave, Main Roof - Asphalt Shingle	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 24.9 %			
031319BD15 8	219032420-15 **Location:** 79 Lester Ave, Deck Roof - Asphalt Paper	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 0.4 %			
031319BD16 8	219032420-16 **Location:** 79 Lester Ave, Deck Roof - Asphalt Paper	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 0.4 %			
031319BD17 9	219032420-17 **Location:** 79 Lester Ave, Deck Roof - Asphalt Shingle	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Fibrous glass Trace, Non-fibrous 32.4 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

19.9107; GMV Land Bank; Ilion, NY

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
031319BD18 9	219032420-18 **Location:** 79 Lester Ave, Deck Roof - Asphalt Shingle	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 29.5 %			
031319BD19 10	219032420-19 **Location:** 79 Lester Ave, Exterior Walls - Asphalt Siding	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 40.3 %			
031319BD20 10	219032420-20 **Location:** 79 Lester Ave, Exterior Walls - Asphalt Siding	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 53.5 %			
031319BD21 11	219032420-21 **Location:** 79 Lester Ave, Exterior Windows - Glazing	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: OffWhite, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 4.7 %			
031319BD22 11	219032420-22 **Location:** 79 Lester Ave, Exterior Windows - Glazing	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: OffWhite, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 24.2 %			
031319BD23 12	219032420-23 **Location:** 79 Lester Ave, Entry Hall, Kitchen - Sheet Flooring	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: White/Green, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 7.4 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

19.9107; GMV Land Bank; Ilion, NY

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
031319BD24 12	219032420-24 **Location:** 79 Lester Ave, Entry Hall, Kitchen - Sheet Flooring	*No*	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: White/Green, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 0.4 %			
031319BD25 13	219032420-25 **Location:** 79 Lester Ave, 2nd FL Bath - Sheet Flooring	*No*	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Green, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 3 %			
031319BD26 13	219032420-26 **Location:** 79 Lester Ave, 2nd FL Bath - Sheet Flooring	*No*	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Green, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 1.2 %			
031319BD27 14	219032420-27 **Location:** 79 Lester Ave, Bdrm 1 - Sheet Flooring	*No*	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Beige, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 1 %			
031319BD28 14	219032420-28 **Location:** 79 Lester Ave, Bdrm 1 - Sheet Flooring	*No*	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Beige, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 1.3 %			
031319BD29 15	219032420-29 **Location:** 79 Lester Ave, Bdrm 1 Closet - Sheet Flooring	*No*	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Grey, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 8.7 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

19.9107; GMV Land Bank; Ilion, NY

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
031319BD30 15	219032420-30 **Location:** 79 Lester Ave, Bdrm 1 Closet - Sheet Flooring	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Grey, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 7.6 %			
031319BD31 16	219032420-31 **Location:** 79 Lester Ave, Bdrm 2 Closet - Sheet Flooring	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Red/Brown, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 3.9 %			
031319BD32 16	219032420-32 **Location:** 79 Lester Ave, Bdrm 2 Closet - Sheet Flooring	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Red/Brown, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 3.3 %			
031319BD33 17	219032420-33 **Location:** 79 Lester Ave, Throughout - Rock Lath	***No***	NAD (by NYS ELAP 198.1) by Jared C. Clarke on 03/18/19
Analyst Description: Grey/Brown, Heterogeneous, Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Cellulose 25 %, Non-fibrous 75 %			
031319BD34 17	219032420-34 **Location:** 79 Lester Ave, Throughout - Rock Lath	***No***	NAD (by NYS ELAP 198.1) by Jared C. Clarke on 03/18/19
Analyst Description: Grey/Brown, Heterogeneous, Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Cellulose 25 %, Non-fibrous 75 %			
031319BD35 17	219032420-35 **Location:** 79 Lester Ave, Bdrm 2 - Rock Lath	***No***	NAD (by NYS ELAP 198.1) by Jared C. Clarke on 03/18/19
Analyst Description: Grey/Brown, Heterogeneous, Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Cellulose 30 %, Non-fibrous 70 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

19.9107; GMV Land Bank; Ilion, NY

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
031319BD36 17	219032420-36 **Location:** 79 Lester Ave, Bdrm 2 - Rock Lath	***No***	NAD (by NYS ELAP 198.1) by Jared C. Clarke on 03/18/19
Analyst Description: Grey/Brown, Heterogeneous, Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Cellulose 25 %, Non-fibrous 75 %			
031319BD37 18	219032420-37 **Location:** 79 Lester Ave, Throughout - Plaster Brown	***Yes***	Trace (<0.25 % pc) (EPA 400 PC) by Jared C. Clarke on 03/18/19
Analyst Description: Grey, Homogeneous, Fibrous, Cementitious, Bulk Material **Asbestos Types:** Chrysotile <0.25 % pc **Other Material:** Cellulose 5 %, Non-fibrous 95 %			
031319BD38 18	219032420-38 **Location:** 79 Lester Ave, Throughout - Plaster Brown	***Yes***	0.8 % (EPA 400 PC) by Jared C. Clarke on 03/18/19
Analyst Description: Grey, Homogeneous, Fibrous, Cementitious, Bulk Material **Asbestos Types:** Chrysotile 0.8 % **Other Material:** Cellulose 5 %, Non-fibrous 94.2 %			
031319BD39 18	219032420-39 **Location:** 79 Lester Ave, Throughout - Plaster Brown	***Yes***	0.5 % (EPA 400 PC) by Jared C. Clarke on 03/18/19
Analyst Description: Grey, Homogeneous, Fibrous, Cementitious, Bulk Material **Asbestos Types:** Chrysotile 0.5 % **Other Material:** Cellulose 5 %, Non-fibrous 94.5 %			
031319BD40 18	219032420-40 **Location:** 79 Lester Ave, Throughout - Plaster Brown	***Yes***	0.5 % (EPA 400 PC) by Jared C. Clarke on 03/18/19
Analyst Description: Grey, Homogeneous, Fibrous, Cementitious, Bulk Material **Asbestos Types:** Chrysotile 0.5 % **Other Material:** Cellulose 5 %, Non-fibrous 94.5 %			
031319BD41 19	219032420-41 **Location:** 79 Lester Ave, Dining Rm - Wallpaper	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Brown, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 25.1 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

19.9107; GMV Land Bank; Ilion, NY

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
031319BD42 19	219032420-42 **Location:** 79 Lester Ave, Dining Rm - Wallpaper	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Brown, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 23.4 %			
031319BD43 20	219032420-43 **Location:** 79 Lester Ave, Stairwell - Wallpaper	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: White/Green, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 18.2 %			
031319BD44 20	219032420-44 **Location:** 79 Lester Ave, Stairwell - Wallpaper	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: White/Grey, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 13.3 %			
031319BD45 18	219032420-45 **Location:** 79 Lester Ave, Kitchen - Plaster Brown	***Yes***	Trace (<0.25 % pc) (EPA 400 PC) by Jared C. Clarke on 03/18/19
Analyst Description: Grey, Homogeneous, Fibrous, Cementitious, Bulk Material **Asbestos Types:** Chrysotile <0.25 % pc **Other Material:** Cellulose 5 %, Non-fibrous 95 %			
031319BD46 18	219032420-46 **Location:** 79 Lester Ave, Kitchen - Plaster Brown	***Yes***	Trace (<0.25 % pc) (EPA 400 PC) by Jared C. Clarke on 03/18/19
Analyst Description: Grey, Homogeneous, Fibrous, Cementitious, Bulk Material **Asbestos Types:** Chrysotile <0.25 % pc **Other Material:** Cellulose 5 %, Non-fibrous 95 %			
031319BD47 19	219032420-47 **Location:** 79 Lester Ave, Kitchen Walls - Adhesive	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black/Brown, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 34.2 %			

See Reporting notes on last page

PLM Bulk Asbestos Report

19.9107; GMV Land Bank; Ilion, NY

Client No. / HGA	Lab No.	Asbestos Present	Total % Asbestos
031319BD48 19	219032420-48 **Location:** 79 Lester Ave, Kitchen Walls - Adhesive	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Black/Brown, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 45.8 %			
031319BD49 20	219032420-49 **Location:** 79 Lester Ave, Kitchen Walls - Paneling	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Tan, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 15.3 %			
031319BD50 20	219032420-50 **Location:** 79 Lester Ave, Kitchen Walls - Paneling	***No***	NAD (by NYS ELAP 198.6) by Jared C. Clarke on 03/18/19
Analyst Description: Tan, Homogeneous, Non-Fibrous, Bulk Material **Asbestos Types:** **Other Material:** Non-fibrous 1.8 %			

Reporting Notes:

(1) This job was - Analyzed using Motic BA310 Pol Scope S/N 1190000326

Analyzed by: Jared C. Clarke

*NAD/NSD =no asbestos detected; NA=not analyzed; NA/PS=not analyzed/positive stop, (SOF-V) = Sprayed On Fireproofing containing Vermiculite; (SM-V) = Surfacing Material containing Vermiculite; PLM Bulk Asbestos Analysis by Appd E to Subpt E, 40 CFR 763 (NVLAP 200546-0), ELAP PLM Method 198.1 for NY friable samples, which includes the identification and quantitation of vermiculite or 198.6 for NOB samples or EPA 400 pt ct by Appd E to Subpt E, 40 CFR 763 (NY ELAP Lab 11480); Note:PLM is not consistently reliable in detecting asbestos in floor coverings and similar non-friable organically bound materials. NAD or Trace results by PLM are inconclusive, TEM is currently the only method that can be used to determine if this material can be considered or treated as non asbestos-containing in NY State (also see EPA Advisory for floor tile, FR 59,146,38970,8/1/94) National Institute of Standards and Technology Accreditation requirements mandate that this report must not be reproduced except in full without the approval of the lab.This PLM report relates ONLY to the items tested. AIHA-LAP, LLC Lab ID 102843, RI Cert AAL-094, CT Cert PH-0186, Mass Cert AA000054.

Reviewed By: _____ END OF REPORT

Table I
Summary of Bulk Asbestos Analysis Results
19.9107; GMV Land Bank; Ilion, NY

AmeriSci Sample #	Client Sample#	HG Area	Sample Weight (gram)	Heat Sensitive Organic %	Acid Soluble Inorganic %	Insoluble Non-Asbestos Inorganic %	** Asbestos % by PLM/DS	** Asbestos % by TEM
01	031319BD01	1	0.183	92.9	2.7	4.4	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Paper							
02	031319BD02	1	0.230	88.3	3.0	8.7	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Paper							
03	031319BD03	2	0.226	95.6	3.1	1.3	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Paper							
04	031319BD04	2	0.187	96.3	2.7	1.1	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Paper							
05	031319BD05	3	0.214	75.2	22.9	1.9	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Shingle							
06	031319BD06	3	0.301	72.1	20.6	7.3	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Shingle							
07	031319BD07	4	0.398	50.8	26.4	22.9	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Paper							
08	031319BD08	4	0.241	64.7	19.1	16.2	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Paper							
09	031319BD09	5	0.292	44.9	21.2	33.9	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Shingle							
10	031319BD10	5	0.378	42.3	28.0	29.6	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Shingle							
11	031319BD11	6	0.388	74.2	18.8	7.0	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Paper							
12	031319BD12	6	0.312	97.1	1.9	1.0	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Paper							
13	031319BD13	7	0.299	54.5	17.7	27.8	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Shingle							
14	031319BD14	7	0.378	58.5	16.7	24.9	NAD	NAD
Location:	79 Lester Ave, Main Roof - Asphalt Shingle							
15	031319BD15	8	0.244	96.7	2.9	0.4	NAD	NAD
Location:	79 Lester Ave, Deck Roof - Asphalt Paper							
16	031319BD16	8	0.227	95.6	4.0	0.4	NAD	NAD
Location:	79 Lester Ave, Deck Roof - Asphalt Paper							

See Reporting notes on last page

Table I
Summary of Bulk Asbestos Analysis Results
19.9107; GMV Land Bank; Ilion, NY

AmeriSci Sample #	Client Sample#	HG Area	Sample Weight (gram)	Heat Sensitive Organic %	Acid Soluble Inorganic %	Insoluble Non-Asbestos Inorganic %	** Asbestos % by PLM/DS	** Asbestos % by TEM
17	031319BD17	9	0.454	26.0	41.6	32.4	NAD	NAD
Location:	79 Lester Ave, Deck Roof - Asphalt Shingle							
18	031319BD18	9	0.373	29.2	41.3	29.5	NAD	NAD
Location:	79 Lester Ave, Deck Roof - Asphalt Shingle							
19	031319BD19	10	0.352	53.7	6.0	40.3	NAD	NAD
Location:	79 Lester Ave, Exterior Walls - Asphalt Siding							
20	031319BD20	10	0.424	41.0	5.4	53.5	NAD	NAD
Location:	79 Lester Ave, Exterior Walls - Asphalt Siding							
21	031319BD21	11	0.340	12.9	82.4	4.7	NAD	NAD
Location:	79 Lester Ave, Exterior Windows - Glazing							
22	031319BD22	11	0.297	13.8	62.0	24.2	NAD	NAD
Location:	79 Lester Ave, Exterior Windows - Glazing							
23	031319BD23	12	0.271	19.9	72.7	7.4	NAD	NAD
Location:	79 Lester Ave, Entry Hall, Kitchen - Sheet Flooring							
24	031319BD24	12	0.228	19.3	80.3	0.4	NAD	NAD
Location:	79 Lester Ave, Entry Hall, Kitchen - Sheet Flooring							
25	031319BD25	13	0.231	82.7	14.3	3.0	NAD	NAD
Location:	79 Lester Ave, 2nd FL Bath - Sheet Flooring							
26	031319BD26	13	0.165	78.8	20.0	1.2	NAD	NAD
Location:	79 Lester Ave, 2nd FL Bath - Sheet Flooring							
27	031319BD27	14	0.210	76.2	22.9	1.0	NAD	NAD
Location:	79 Lester Ave, Bdrm 1 - Sheet Flooring							
28	031319BD28	14	0.152	65.8	32.9	1.3	NAD	NAD
Location:	79 Lester Ave, Bdrm 1 - Sheet Flooring							
29	031319BD29	15	0.254	81.5	9.8	8.7	NAD	NAD
Location:	79 Lester Ave, Bdrm 1 Closet - Sheet Flooring							
30	031319BD30	15	0.158	81.0	11.4	7.6	NAD	NAD
Location:	79 Lester Ave, Bdrm 1 Closet - Sheet Flooring							
31	031319BD31	16	0.258	77.1	19.0	3.9	NAD	NAD
Location:	79 Lester Ave, Bdrm 2 Closet - Sheet Flooring							
32	031319BD32	16	0.246	71.5	25.2	3.3	NAD	NAD
Location:	79 Lester Ave, Bdrm 2 Closet - Sheet Flooring							

See Reporting notes on last page

Table I
Summary of Bulk Asbestos Analysis Results
19.9107; GMV Land Bank; Ilion, NY

AmeriSci Sample #	Client Sample#	HG Area	Sample Weight (gram)	Heat Sensitive Organic %	Acid Soluble Inorganic %	Insoluble Non-Asbestos Inorganic %	** Asbestos % by PLM/DS	** Asbestos % by TEM
33	031319BD33	17	----	----	----	----	NAD	NA
Location:	79 Lester Ave, Throughout - Rock Lath							
34	031319BD34	17	----	----	----	----	NAD	NA
Location:	79 Lester Ave, Throughout - Rock Lath							
35	031319BD35	17	----	----	----	----	NAD	NA
Location:	79 Lester Ave, Bdrm 2 - Rock Lath							
36	031319BD36	17	----	----	----	----	NAD	NA
Location:	79 Lester Ave, Bdrm 2 - Rock Lath							
37	031319BD37	18	----	----	----	----	Chrysotile <0.25	NA
Location:	79 Lester Ave, Throughout - Plaster Brown							
38	031319BD38	18	----	----	----	----	Chrysotile 0.8	NA
Location:	79 Lester Ave, Throughout - Plaster Brown							
39	031319BD39	18	----	----	----	----	Chrysotile 0.5	NA
Location:	79 Lester Ave, Throughout - Plaster Brown							
40	031319BD40	18	----	----	----	----	Chrysotile 0.5	NA
Location:	79 Lester Ave, Throughout - Plaster Brown							
41	031319BD41	19	0.191	67.5	7.3	25.1	NAD	NAD
Location:	79 Lester Ave, Dining Rm - Wallpaper							
42	031319BD42	19	0.171	71.3	5.3	23.4	NAD	NAD
Location:	79 Lester Ave, Dining Rm - Wallpaper							
43	031319BD43	20	0.099	76.8	5.1	18.2	NAD	NAD
Location:	79 Lester Ave, Stairwell - Wallpaper							
44	031319BD44	20	0.128	79.7	7.0	13.3	NAD	NAD
Location:	79 Lester Ave, Stairwell - Wallpaper							
45	031319BD45	18	----	----	----	----	Chrysotile <0.25	NA
Location:	79 Lester Ave, Kitchen - Plaster Brown							
46	031319BD46	18	----	----	----	----	Chrysotile <0.25	NA
Location:	79 Lester Ave, Kitchen - Plaster Brown							
47	031319BD47	19	0.284	33.8	32.0	34.2	NAD	NAD
Location:	79 Lester Ave, Kitchen Walls - Adhesive							
48	031319BD48	19	0.201	35.3	18.9	45.8	NAD	NAD
Location:	79 Lester Ave, Kitchen Walls - Adhesive							

See Reporting notes on last page

Table I
Summary of Bulk Asbestos Analysis Results
19.9107; GMV Land Bank; Ilion, NY

AmeriSci Sample #	Client Sample#	HG Area	Sample Weight (gram)	Heat Sensitive Organic %	Acid Soluble Inorganic %	Insoluble Non-Asbestos Inorganic %	** Asbestos % by PLM/DS	** Asbestos % by TEM
49	031319BD49	20	0.262	59.2	25.6	15.3	NAD	NAD
Location:	79 Lester Ave, Kitchen Walls - Paneling							
50	031319BD50	20	0.220	73.2	25.0	1.8	NAD	NAD
Location:	79 Lester Ave, Kitchen Walls - Paneling							

Analyzed by: John P. Koubiadis Date Analyzed 3/19/2019

**Quantitative Analysis (Semi/Full); Bulk Asbestos Analysis - PLM by Appd E to Subpt E, 40 CFR 763 or ELAP 198.1 for New York friable samples or ELAP 198.6 for New York NOB samples; TEM (Semi/Full) by EPA 600/R-93/116 (or ELAP 198.4; for New York samples; NAD = no asbestos detected during a quantitative analysis; NA = not analyzed; Trace = <1%; (SOF-V) = Sprayed On Fireproofing containing Vermiculite; (SM-V) = Surfacing Material containing Vermiculite; Quantitation for beginning weights of <0.1 grams should be considered as qualitative only; Qualitative Analysis: Asbestos analysis results of "Present" or "NVA = No Visible Asbestos" represents results for Qualitative PLM or TEM Analysis only (no accreditation coverage available from any regulatory agency for qualitative analyses): NVLAP (PLM) 200546-0, NYSDOH ELAP Lab 11480, AIHA-LAP, LLC (PLM) Lab ID 102843.

Warning Note: PLM limitation, only TEM will resolve fibers <0.25 micrometers in diameter. TEM bulk analysis is representative of the fine grained matrix material and may not be representative of non-uniformly dispersed debris for which PLM evaluation is recommended (i.e. soils and other heterogenous materials).

Reviewed By:

Relinquished By: B. DeBell Date/Time: 3/13/19 1600

Received By: [signature] Date/Time: 3/14/19 12pr

Relinquished By: Date/Time:

Received By: Date/Time:

AMERI SCI

WWW.AMERISCI.COM

BULK CHAIN OF CUSTODY

AMERISCI NEW YORK
117 EAST 30TH STREET
NEW YORK, NY 10016
TOLL FREE: (800) 705-5227
PHONE: (212) 679-8600
FAX: (212) 679-9392

Company: C.T. Male Associates

Street Address: 50 Century Hill Drive

City: Latham State: NY Zip: 12110

Phone: 518-786-7480 Fax:

Cell: 518-265-3119 Fax:

E-mail m.sawyer@ctmale.com Verbal Results: Y / N

Results to: Michael Sawyer

Special Instructions or Comments:

Project: GMV Land Bank AMERISCI #: #2190324 20

Proj Mgr: Michael Sawyer Proj #: 19907

Proj Address: [redacted] Alon Proj State: NY

Analysis: ✓ PLM; ✓ Positive Stop; __ TEM; ✓ NY ELAP PLM/TEM w/ NOB Prep.

ASTM Dust __ (Microvac) __ (Wipe); __ Qualitative; __ Other (describe in comments)

Turnaround Time: Material Type: ✓ Bulk __ Dust __ Water

Sampled By: B. DeBell Date Sampled: 3/13/19

Lab ID	Field ID	Location	Sample Description (dust area)	Homogenous Area
	031319BD01	79 Lester Ave. Main Roof	Asphalt paper	1
	02	" "	" "	1
	03	" "	" "	2
	04	" "	" "	2
	05	" "	" shingle	3
	06	" "	" "	3
	07	" "	" paper	4
	08	" "	" "	4
	09	" "	" shingle	5
	10	" "	" "	5
	11	" "	" paper	6
	12	" "	" "	6
	13	" "	" shingle	7
	14	" "	" "	7
	15	Deck Roof	" paper	8
	16	" "	" "	8
	17	" "	" shingle	9

Relinquished By: B. DeBell Date/Time: 3/13/19 1600

Received By: [illegible] Date/Time: 3/14/19 1220

Relinquished By: Date/Time:

Received By: Date/Time:

AMERISCI

WWW.AMERISCI.COM

BULK CHAIN OF CUSTODY

AMERISCI NEW YORK
117 EAST 30TH STREET
NEW YORK, NY 10016
TOLL FREE: (800) 705-5227
PHONE: (212) 679-8600
FAX: (212) 679-9392

Company: C.T. Male Associates

Street Address: 50 Century Hill Drive

City: Latham State: NY Zip: 12110

Phone: 518-786-7480 Fax:

Cell: 518-265-3119 Fax:

E-mail m.sawyer@ctmale.com Verbal Results: Y / N

Results to: Michael Sawyer

Special Instructions or Comments:

Project: 9MV Land Bank AMERISCI #: #219032420

Proj Mgr: Michael Sawyer Proj #: 19907

Proj Address: ~~[illegible]~~ Troy Proj State: NY

Analysis: ✓ PLM; ✓ Positive Stop; __ TEM; ✓ NY ELAP PLM/TEM w/ NOB Prep.

ASTM Dust __ (Microvac) __ (Wipe); __ Qualitative; __ Other (describe in comments)

Turnaround Time: Material Type: ✓ Bulk __ Dust __ Water

Sampled By: B. DeBell Date Sampled: 3/13/19

Lab ID	Field ID	Location	Sample Description (dust area)	Homogenous Area
	03131913D 18	79 Lester Ave deck ROOF	Asphalt shingle	9
	14	exterior walls	Asphalt siding	10
	20	" "	" "	10
	21	" windows	Glazing	11
	22	" "	"	11
	23	Entry Hall — Kitchen	sheet flooring	12
	24	" " "	" "	12
	25	2nd Fl Bath	" "	13
	26	" " "	" "	13
	27	BDRM 1	" "	14
	28	" "	" "	14
	29	" " closet	" "	15
	30	" " "	" "	15
	31	" 2 "	" "	16
	32	" " "	" "	16
	33	throughout	Rock lath	17
	34	"	" "	17

Relinquished By:	B. DeBell	Date/Time:	3/13/19 1600
Received By:		Date/Time:	3/14/19 1215
Relinquished By:		Date/Time:	
Received By:		Date/Time:	

AMERISCI
WWW.AMERISCI.COM

BULK CHAIN OF CUSTODY

AMERISCI NEW YORK
117 EAST 30TH STREET
NEW YORK, NY 10016
TOLL FREE: (800) 705-5227
PHONE: (212) 679-8600
FAX: (212) 679-9392

Company:	C.T. Male Associates	Project:	GMV Land Bank
Street Address:	50 Century Hill Drive	Proj Mgr:	Michael Sawyer
City:	Latham	State: NY	Zip: 12110
Phone:	518-786-7480	Fax:	
Cell:	518-265-3119	Fax:	
E-mail	m.sawyer@ctmale.com	Verbal Results: Y / N	
Results to:	Michael Sawyer		

AMERISCI #: 219032420
Proj #: 19107
Proj Address: ~~FISHKILL~~ LION
Proj State: NY
Analysis: ✓ PLM; ✓ Positive Stop; __ TEM; ✓ NY ELAP PLM/TEM w/ NOB Prep.
ASTM Dust __ (Microvac) __ (Wipe); __ Qualitative; __ Other (describe in comments)
Turnaround Time:
Material Type: ✓ Bulk __ Dust __ Water
Sampled By: B. DeBell
Date Sampled: 3/13/19

Special Instructions or Comments:

Lab ID	Field ID	Location	Sample Description (dust area)	Homogenous Area
	03131913D35	79 Lester Ave BDRM 2	Rock Lath	17
	36	" "	" "	17
	37	throughout	plaster brown	18
	38	"	" "	18
	39	"	" "	18
	40	"	" "	18
	41	Dining RM	wall paper	19
	42	" "	" "	19
	43	Stairwell	" "	20
	44	"	" "	20
	45	Kitchen	plaster brown	18
	46	"	" "	18
	47	" WALLS	adhesive	19
	48	" "	"	19
	49	" "	paneling	20
	50	" "	"	20

APPENDIX D

ACM SURVEY
ABATEMENT COST ESTIMATES

NO ACM LOCATED